

FIG. 1

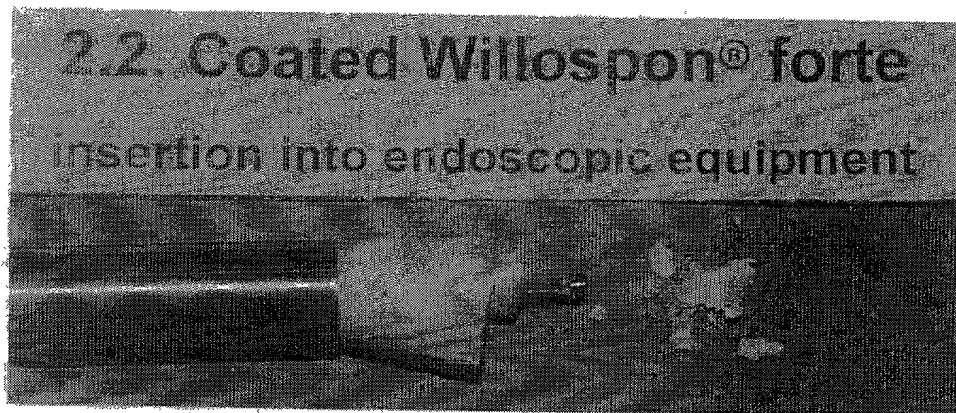
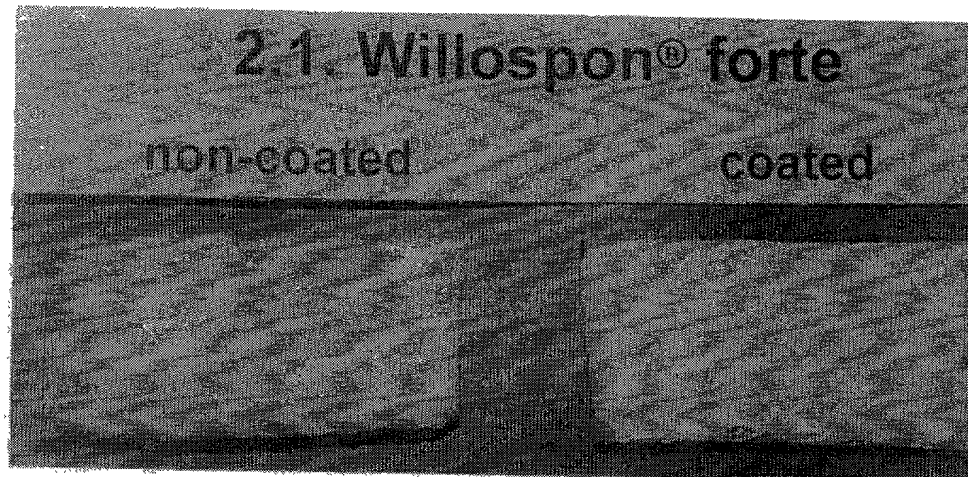


FIG.2

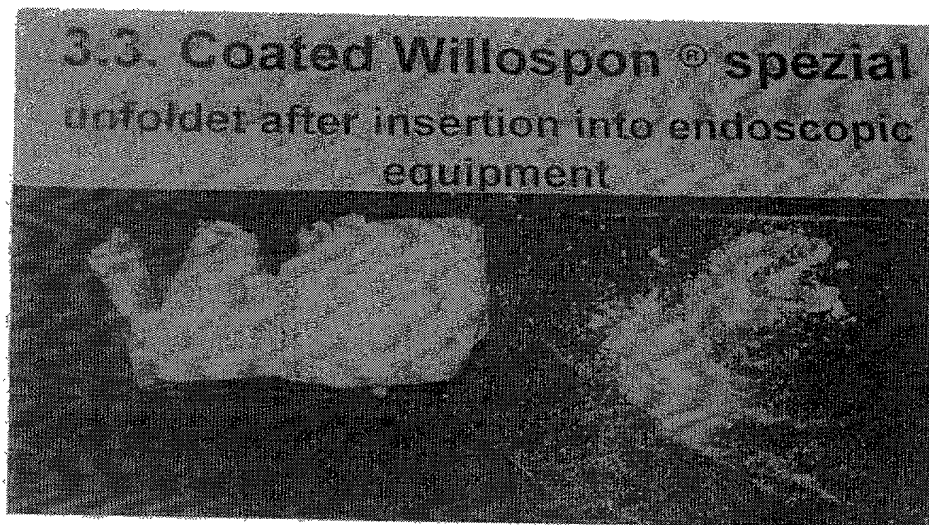
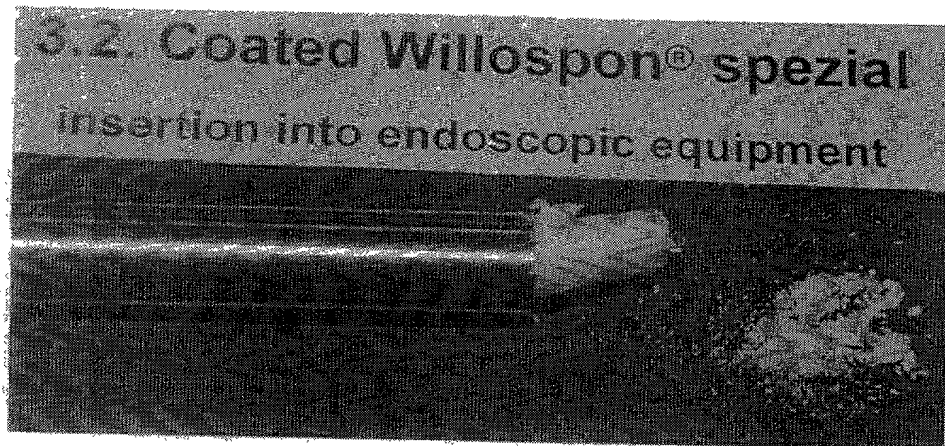
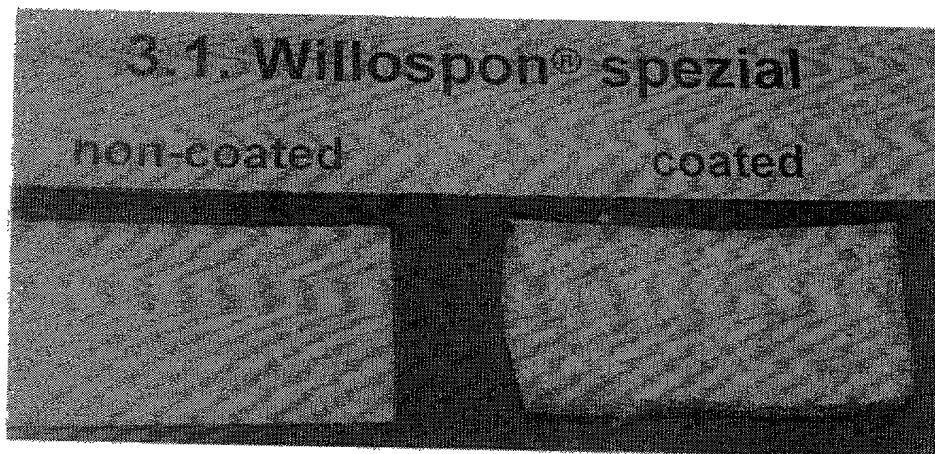


FIG.3

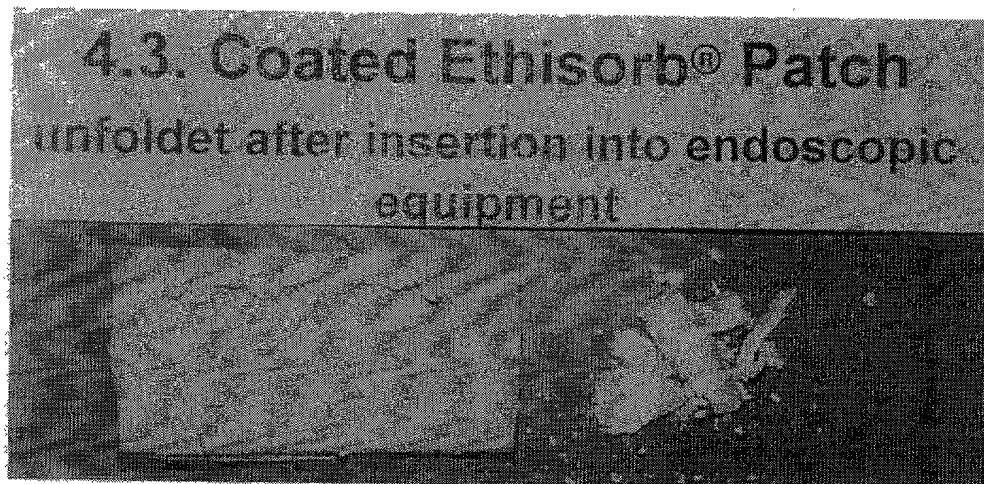
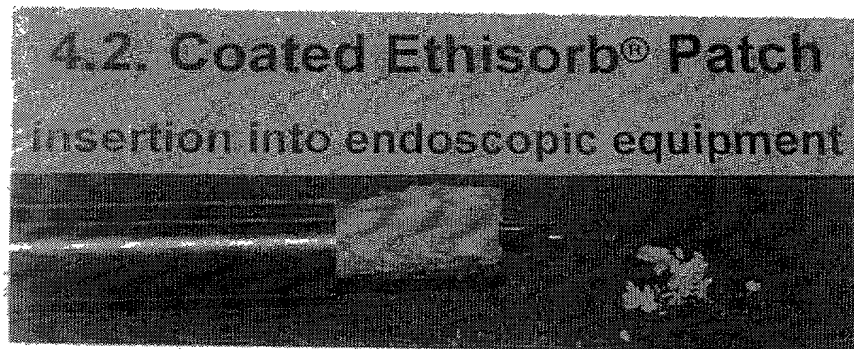
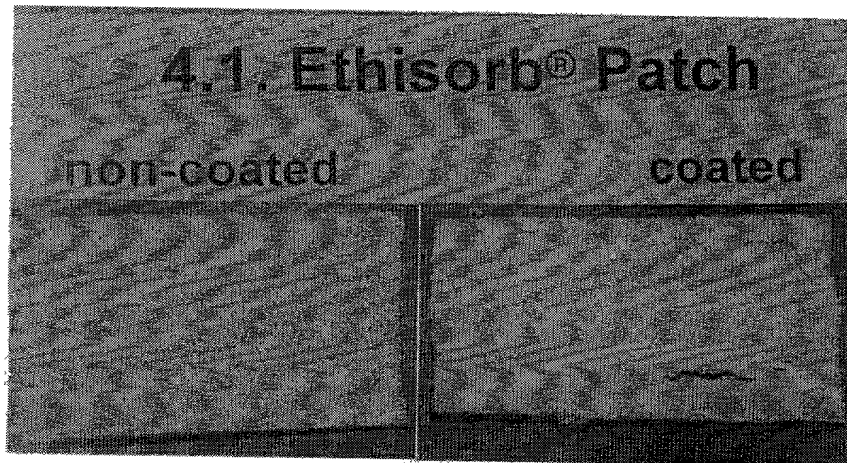


FIG.4

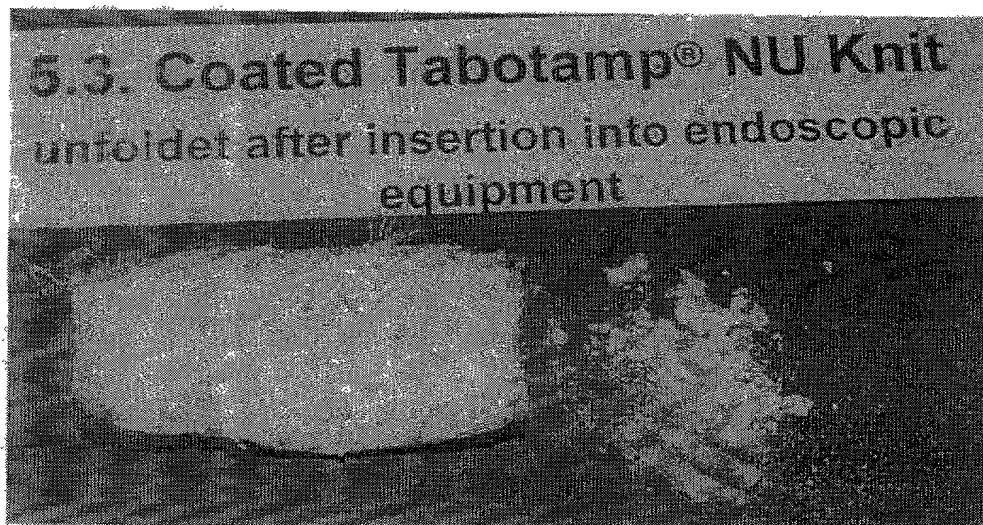
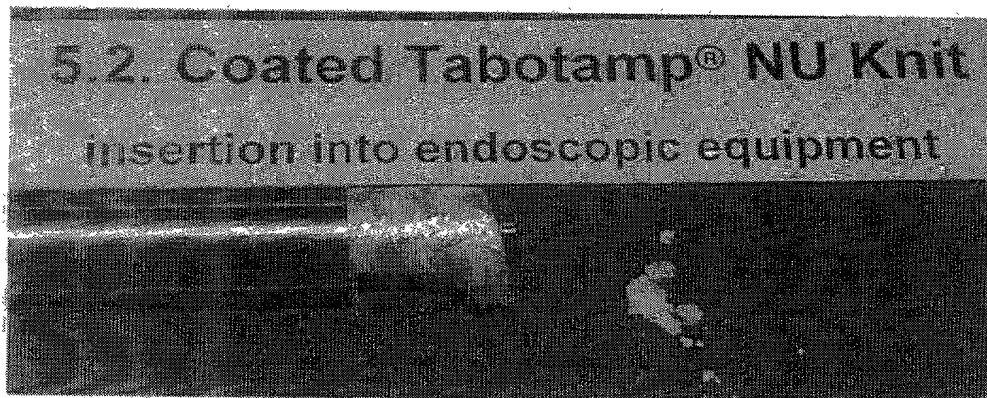
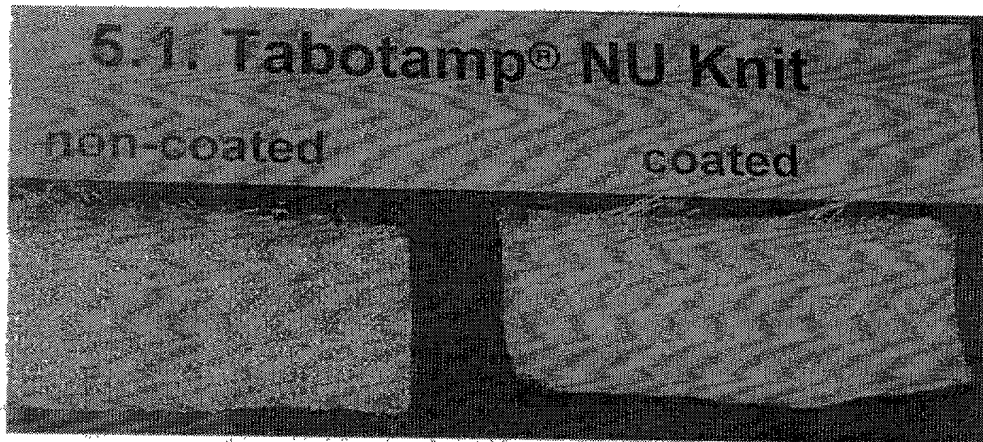


FIG. 5

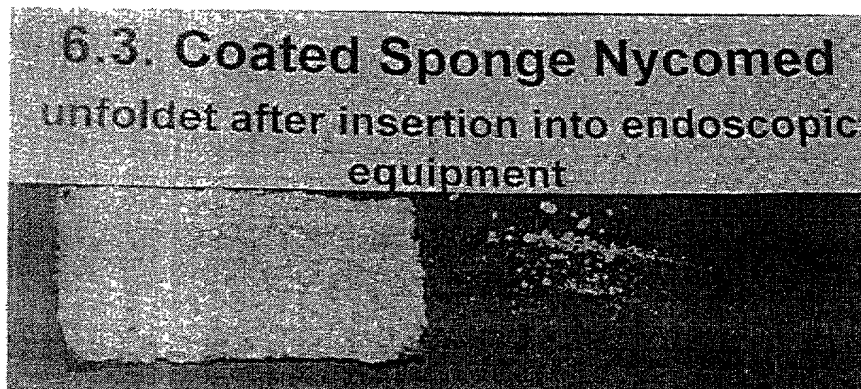
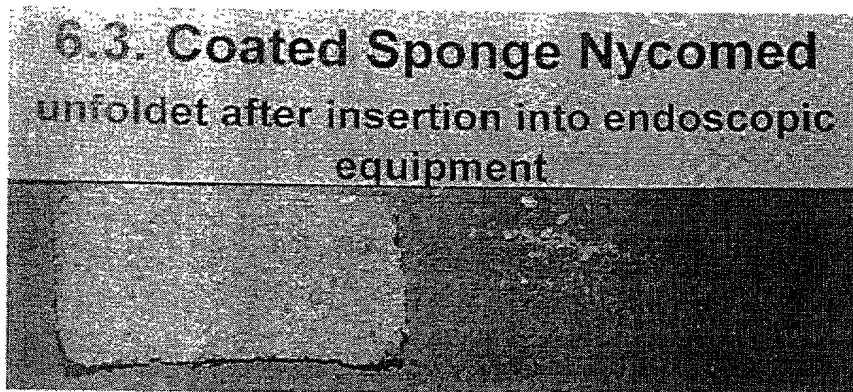
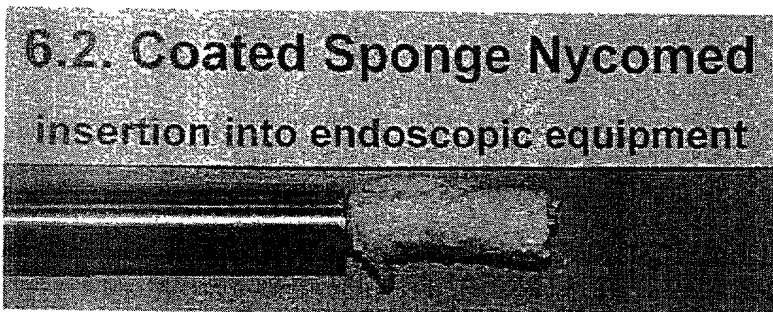
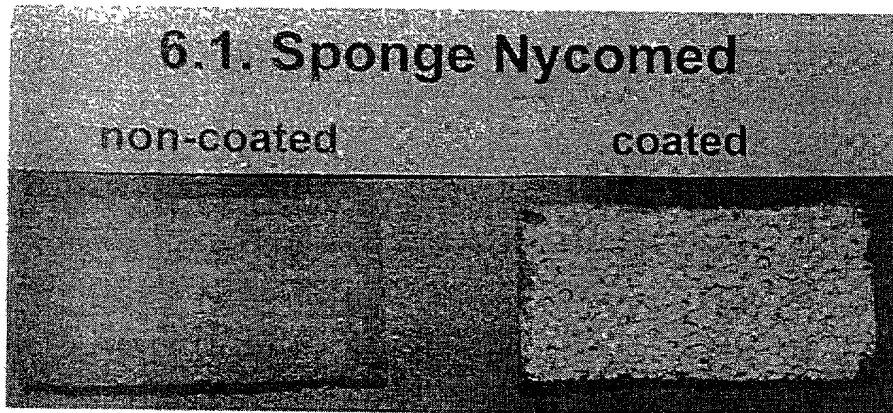


FIG.6

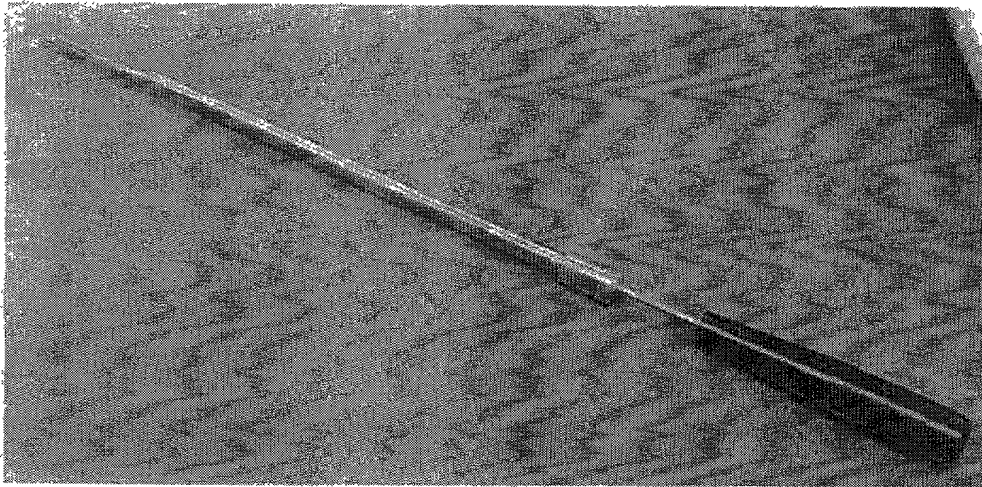
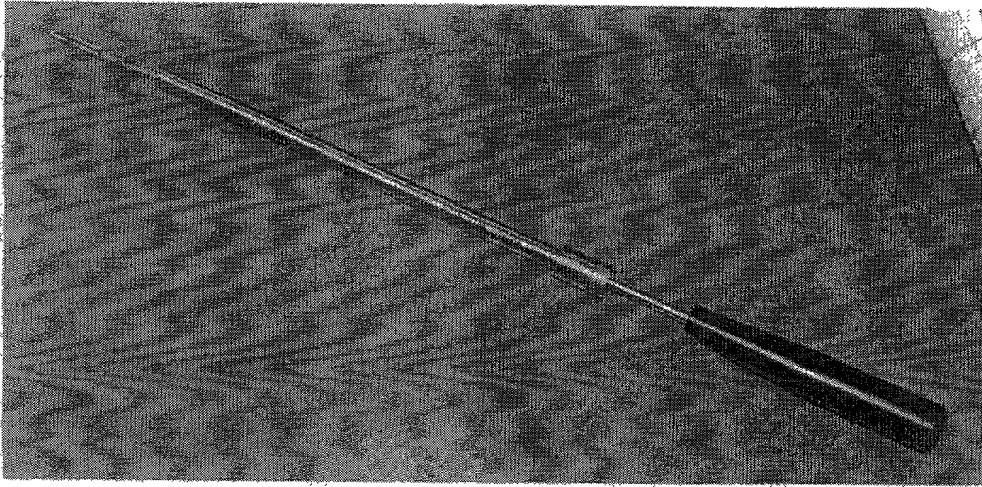
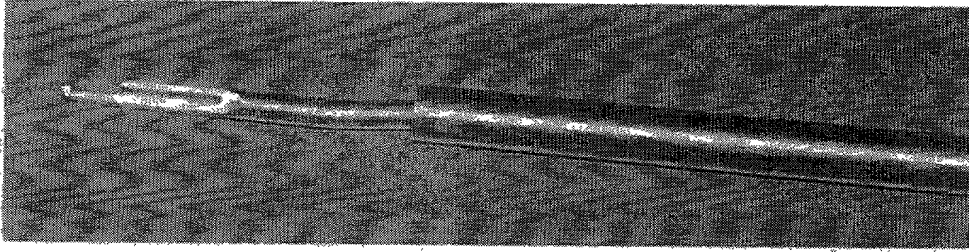


Fig. 7


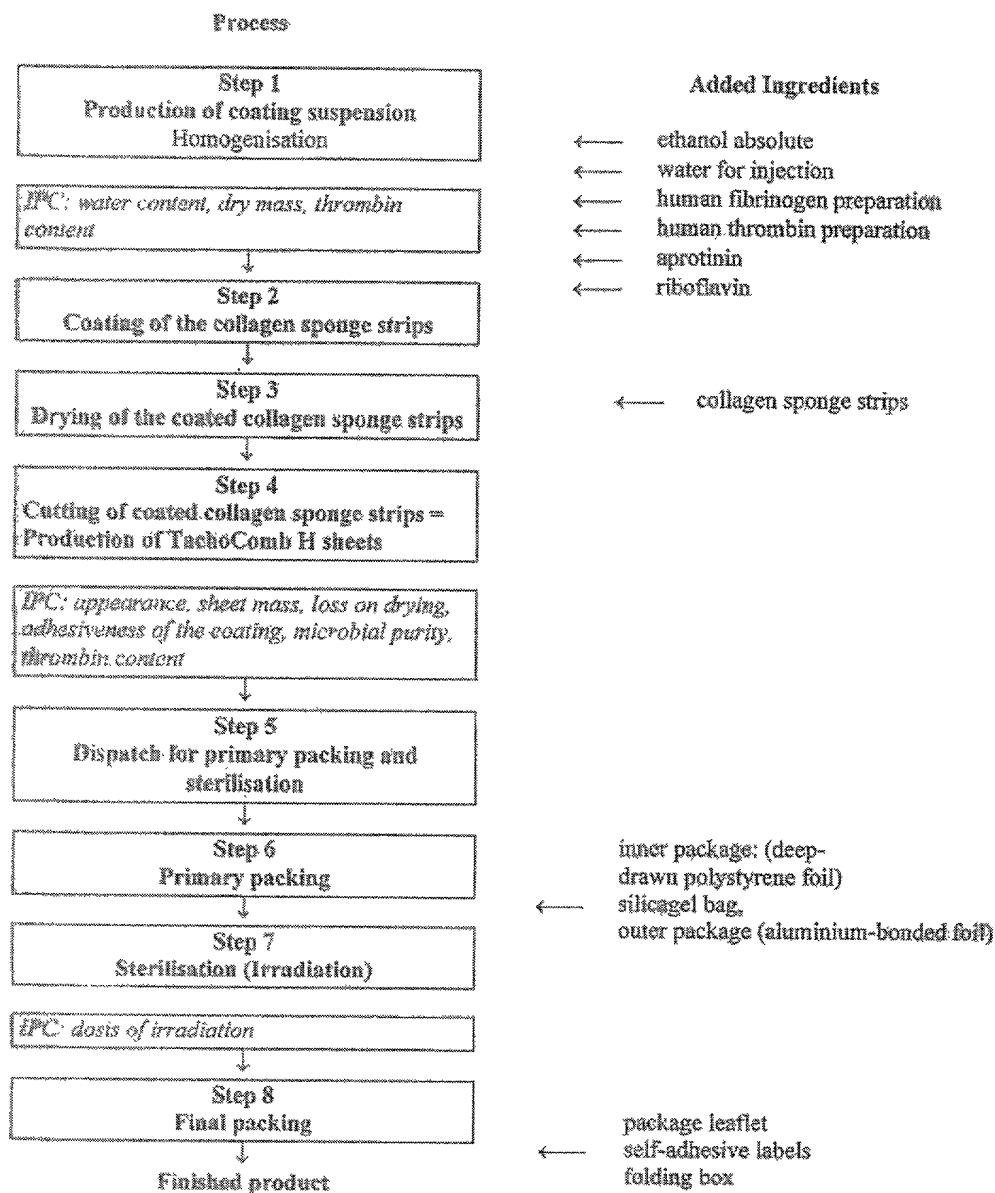


Fig. 8

1. High grade stainless steel
discharge volume: 110 ml

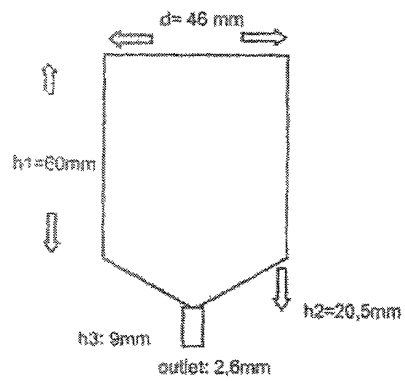

2. Plastic
discharge volume: 96 ml

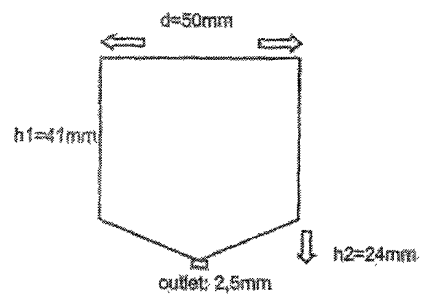


Fig. 9

Process

Added material


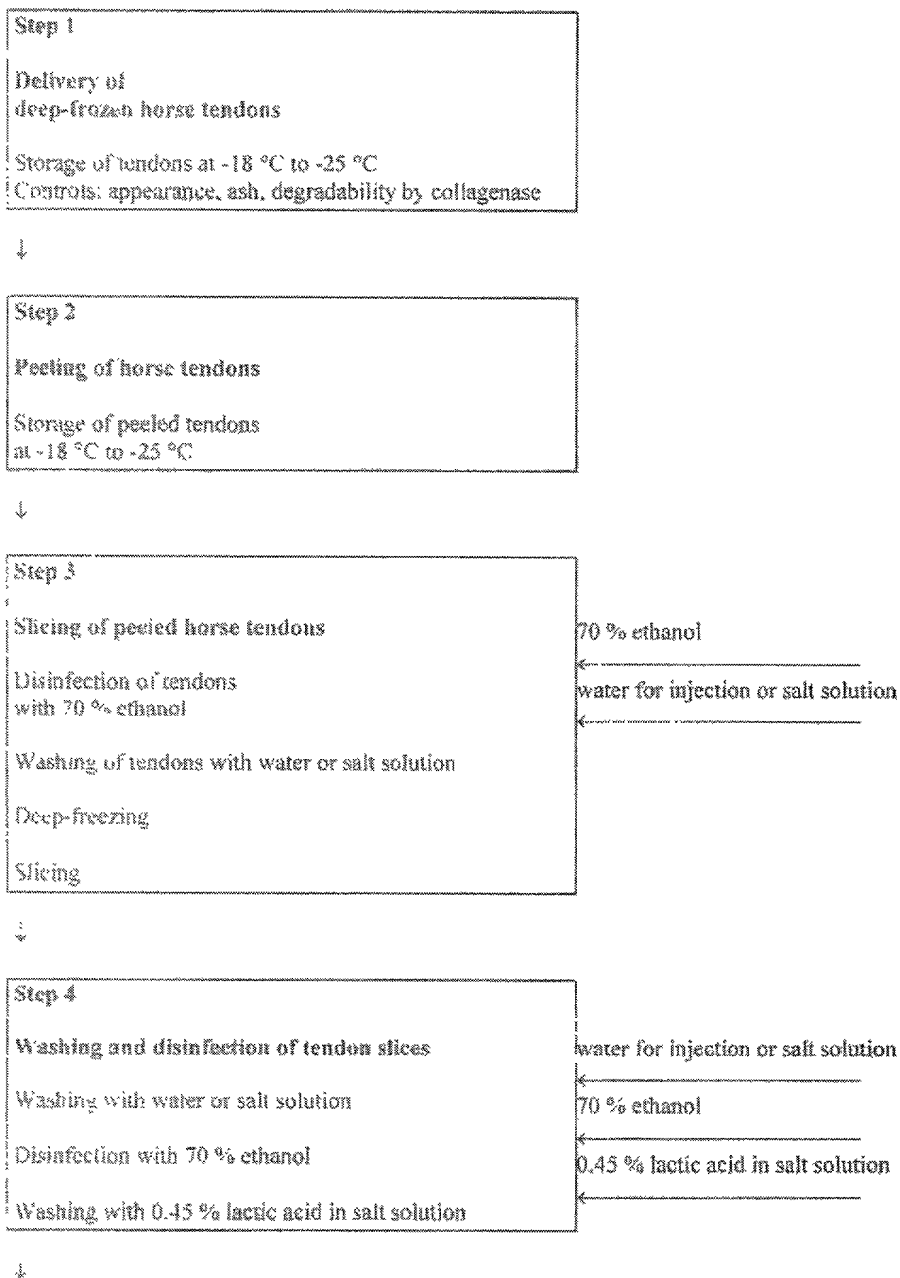



FIG. 10

Process (continued)


Added material

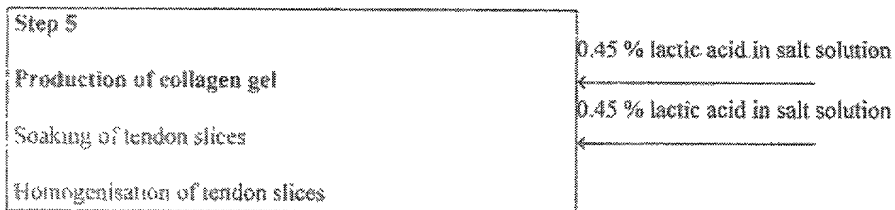

↓

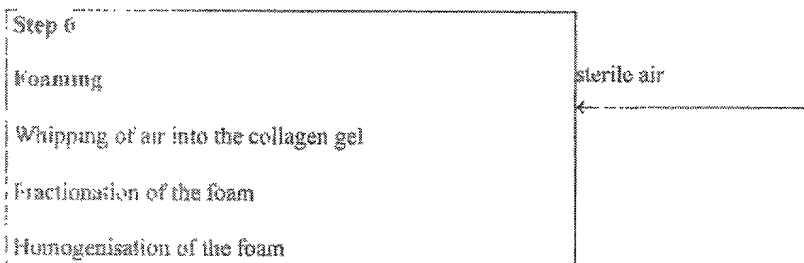

↓

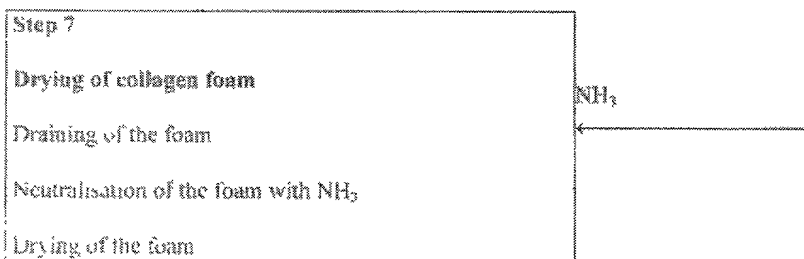

IPC: weight of dried collagen sponge blocks

↓



IPC: weight of collagen sponge strips

↓

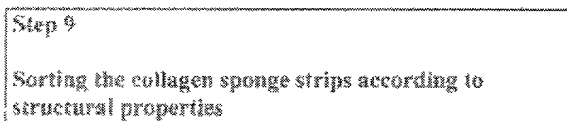


FIG. 11